

TDD-1-S-HC

■ Keg Chiller / Dispenser, Stainless Steel Exterior, 1 Solid Swing Door



Dimensions	
External Width (mm)	597
External Depth (mm)	794
External Height (mm)	1010
Exclusions	Depth does not include 26 mm for rear bumpers. Height does not include 400 mm for draft tower.
Gross Volume (Litres)	227
Unpackaged Weight (kg)	82
Packaged Weight (kg)	93
Packaged Dimensions (W x D x H mm)	883 x 718 x 1143
Internal Capacity for Keg (L x D x H mm)	500 x 450 x 740
Supplied with	Built-in 102 mm castors

Build	
Door Description	Stainless steel exterior with heavy gauge galvanized steel liner.
Door Opening	Right hinged
Exterior Construction	Stainless steel doors, front and sides. Matching aluminum back. All stainless steel counter top.
Interior Construction	Stainless steel floor with 13 mm reinforced lip and heavy gauge galvanized steel walls.
Air Intake Position	Rear
Ventilation Position	Right side
Clearance Required	26 mm rear, 26 mm right side
Cord Length (Meters)	2.13
Standard w/ Locks	Standard

Technical	
Temperature Range	0.5 : 3.3°C
Refrigerant	R290
Voltage/Frequency/Phase	220-240V/50-60Hz/1
Amps	1.2
Watts	276
Defrost Type	Off-Cycle



Specifications subject to change without notice.
Chart dimensions rounded up to the next whole millimeter (inches rounded up to the 1/8")

UK & Ireland
EMEA
Australia


0800 783 2049
[+41 61 563 07 05](tel:+41615630705)
[+61 2 9619 9999](tel:+61296199999)

TFIUK@truemfg.com
TrueCHCustomerService@truemfg.com
TrueRefAus@truemfg.com



TDD-1-S-HC

■ Keg Chiller / Dispenser, Stainless Steel Exterior, 1 Solid Swing Door

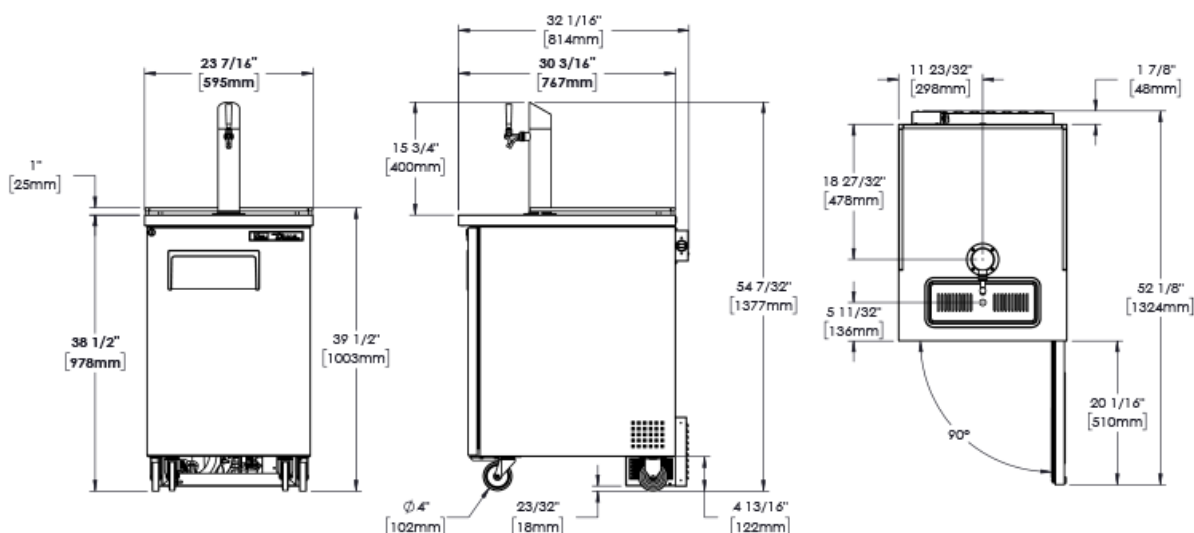

Specifications subject to change without notice.

Chart dimensions rounded up to the next whole millimeter (inches rounded up to the 1/8")

UK & Ireland
EMEA
Australia

0800 783 2049
+41 61 563 07 05
+61 2 9619 9999

TFIUK@truemfg.com
TrueCHCustomerService@truemfg.com
TrueRefAus@truemfg.com

