

# TCR1/3-CL-SS-DL-DR-DR

1/1 GN Counter Refrigerator, 3 Section



| Dimensions                         |                                                                             |
|------------------------------------|-----------------------------------------------------------------------------|
| External Width (mm)                | 1865                                                                        |
| External Depth (mm)                | 700                                                                         |
| External Height (mm)               | 900                                                                         |
| Exclusions                         | Depth does not include 41mm for door handles.                               |
| Net Volume (Litres)                | 249                                                                         |
| Gross Volume (Litres)              | 630                                                                         |
| Supplied Shelves                   | 6                                                                           |
| Shelf Size (L x D mm)              | 530 x 325                                                                   |
| Internal Net Height (mm)           | 500                                                                         |
| Unpackaged Weight (kg)             | 153                                                                         |
| Packaged Weight (kg)               | 164                                                                         |
| Packaged Dimensions (W x D x H mm) | 2032 x 801 x 1069                                                           |
| Supplied with                      | Heavy duty lock-in-place ø 127 mm castors (152 mm height). Plinth mountable |

| Build                 |                                                                                                                                                |
|-----------------------|------------------------------------------------------------------------------------------------------------------------------------------------|
| Door Description      | 3 Solid Swing Doors                                                                                                                            |
| Door Opening          | Left Door opens left, Centre Door opens right, Right Door opens right<br>Configurable and Field Reversible (opposite hinge part sold separate) |
| Exterior Construction | Stainless steel front & countertop, aluminium sides & rear                                                                                     |
| Interior Construction | Clear coated aluminium, stainless steel base                                                                                                   |
| Air Intake Position   | Front                                                                                                                                          |
| Ventilation Position  | Front                                                                                                                                          |
| Clearance Required    | Zero back and sides                                                                                                                            |
| Cord Length (Meters)  | 2.74                                                                                                                                           |
| Standard w/ Locks     | Standard                                                                                                                                       |

| Technical                      |                                                                                    |
|--------------------------------|------------------------------------------------------------------------------------|
| Temperature Range              | 0.5 : 3.3°C                                                                        |
| Refrigerant                    | R290                                                                               |
| Voltage/Frequency/Phase        | 220-240V/50-60Hz/1                                                                 |
| Amps                           | 0.7                                                                                |
| Watts                          | 161                                                                                |
| Climate Class                  | 5                                                                                  |
| Operating Statement            | Heavy Duty: This appliance is intended for use in ambient temperatures up to 40°C. |
| Test Standard                  | EN 16825                                                                           |
| EEC                            | A+                                                                                 |
| Energy Efficiency Index        | 14.6                                                                               |
| Defrost Type                   | Auto                                                                               |
| Energy Consumption (kWh/24h)   | 0.97                                                                               |
| Energy Consumption (kWh/Annum) | 355                                                                                |



Specifications subject to change without notice.

Chart dimensions rounded up to the next whole millimeter (inches rounded up to the 1/8")

UK & Ireland  
EMEA  
Australia


0800 783 2049  
+41 61 563 07 05  
+61 2 9619 9999

TFIUK@truemfg.com  
TrueCHCustomerService@truemfg.com  
TrueRefAus@truemfg.com



# TCR1/3-CL-SS-DL-DR-DR

1/1 GN Counter Refrigerator, 3 Section

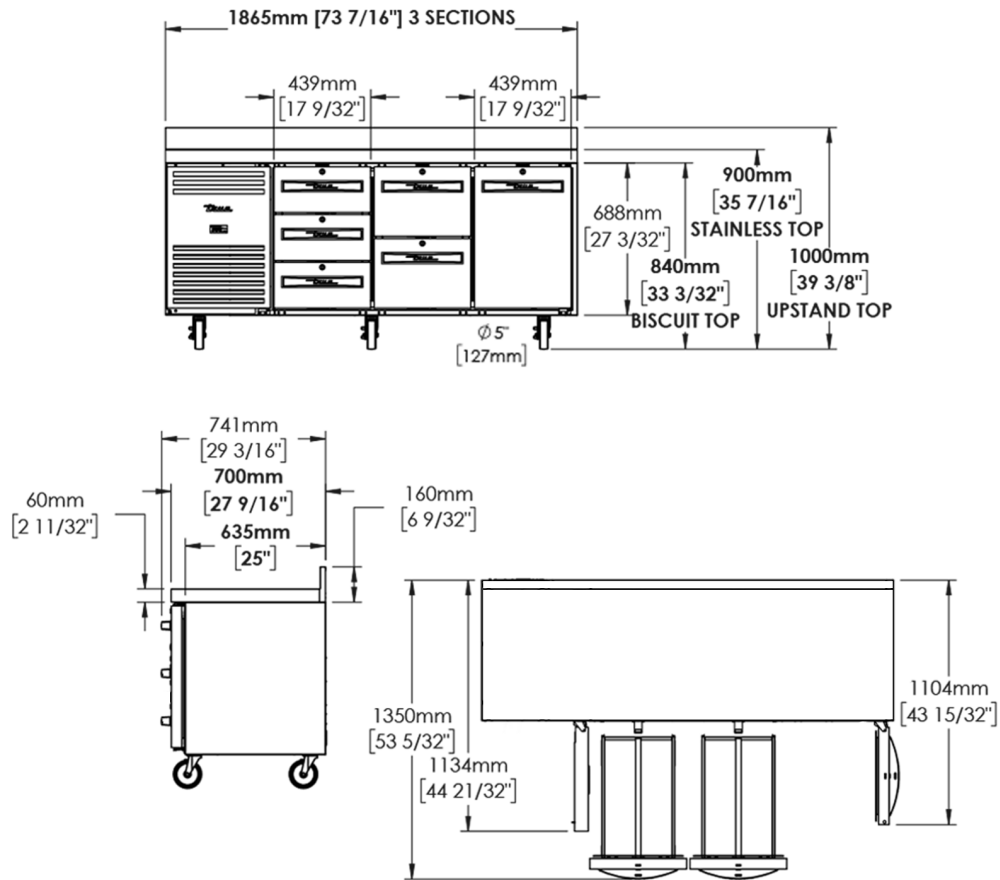

Specifications subject to change without notice.  
Chart dimensions rounded up to the next whole millimeter (inches rounded up to the 1/8")

UK & Ireland  
EMEA  
Australia

0800 783 2049  
+41 61 563 07 05  
+61 2 9619 9999

TFIUK@truemfg.com  
TrueCHCustomerService@truemfg.com  
TrueRefAus@truemfg.com

