

Prep Tables

TFP-32-12M-HC

■ Prep Table, 12x 1/6 Top Pans, 1 Solid Swing Door



Dimensions	
External Width (mm)	816
External Depth (mm)	801
External Height (mm)	1181
Exclusions	Depth does not include 51 mm for cutting board overhang. Height with lid closed.
Gross Volume (Litres)	314
Supplied Shelves	4
Shelf Size (L x D mm)	703 x 508
Internal Net Height (mm)	500
Top Pans Supplied (depth mm)	12x 1/6 GN (100)
Unpackaged Weight (kg)	137
Packaged Weight (kg)	148
Packaged Dimensions (W x D x H mm)	909 x 864 x 1385
Cutting Board (L x D mm)	816 x 204
Supplied with	Built-in recessed castors (19 mm clearance)

Build	
Door Description	1 Solid Swing Door
Door Opening	Right hinged
Exterior Construction	Stainless steel front, top & hood, aluminium sides and rear
Interior Construction	Clear coated aluminium, stainless steel base
Air Intake Position	Front
Ventilation Position	Front
Clearance Required	Zero back and sides
Cord Length (Meters)	2.13
Standard w/ Locks	Not Standard (SPEC3 option)

Technical	
Temperature Range	0.5 : 5°C
Refrigerant	R290
Voltage/Frequency/Phase	220-240V/50Hz/1
Amps	1.9
Watts	437
Defrost Type	Auto



Specifications subject to change without notice.
Chart dimensions rounded up to the next whole millimeter (inches rounded up to the 1/8")

UK & Ireland
EMEA
Australia


0800 783 2049
[+41 61 563 07 05](tel:+41615630705)
[+61 2 9619 9999](tel:+61296199999)

TFIUK@truemfg.com
TrueCHCustomerService@truemfg.com
TrueRefAus@truemfg.com



TFP-32-12M-HC

■ Prep Table, 12x 1/6 Top Pans, 1 Solid Swing Door

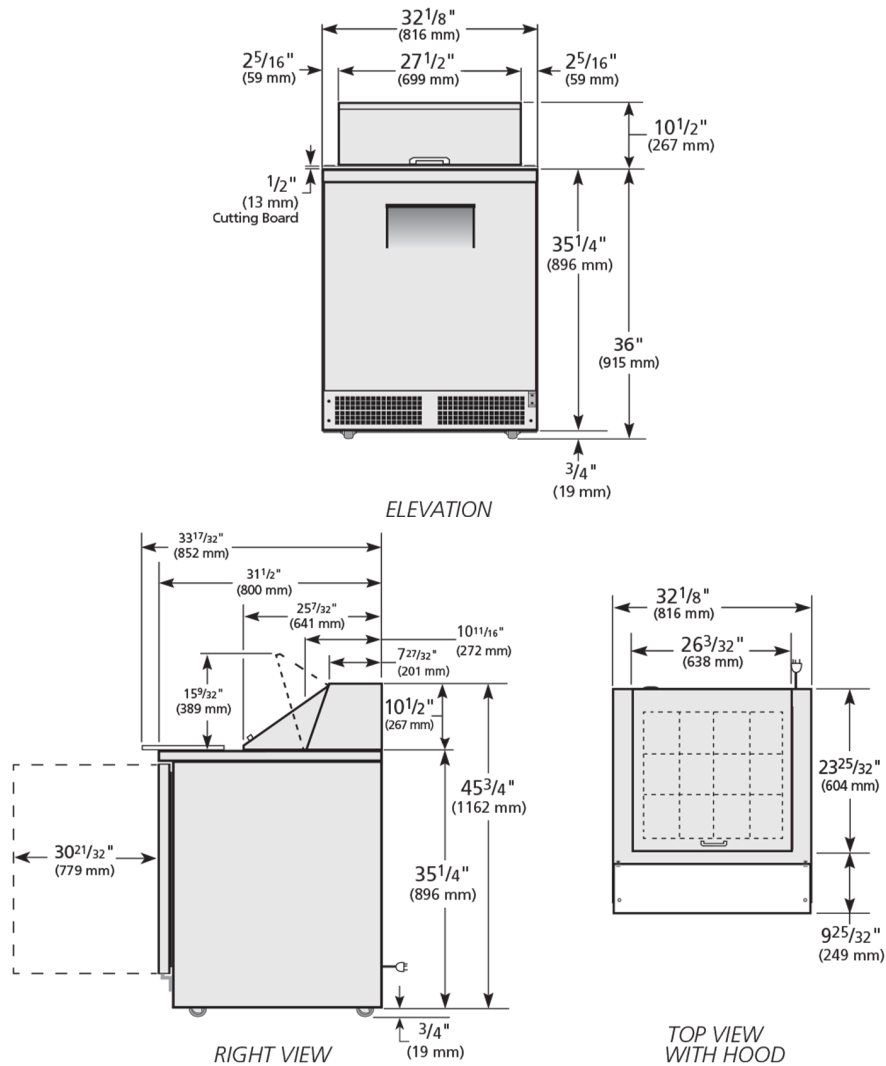

Specifications subject to change without notice.
Chart dimensions rounded up to the next whole millimeter (inches rounded up to the 1/8")

UK & Ireland
EMEA
Australia

0800 783 2049
+41 61 563 07 05
+61 2 9619 9999

TFIUK@truemfg.com
TrueCHCustomerService@truemfg.com
TrueRefAus@truemfg.com

