

Under-equipment Stands

TRCB-96-HC

Under-Equipment Refrigerator, 4 Drawers



| Dimensions                         |                                                           |
|------------------------------------|-----------------------------------------------------------|
| External Width (mm)                | 2426                                                      |
| External Depth (mm)                | 816                                                       |
| External Height (mm)               | 648                                                       |
| Exclusions                         | Depth does not include 26 mm for rear bumpers.            |
| Net Volume (Litres)                | 156                                                       |
| Gross Volume (Litres)              | 589                                                       |
| Per Drawer Capacity (max depth mm) | 3x 1/1 GN (100)                                           |
| Unpackaged Weight (kg)             | 223                                                       |
| Packaged Weight (kg)               | 234                                                       |
| Packaged Dimensions (W x D x H mm) | 2565 x 914 x 775                                          |
| Supplied with                      | Heavy duty lock-in-place ø 102 mm castors (127 mm height) |

| Build                     |                                                                                                                                             |
|---------------------------|---------------------------------------------------------------------------------------------------------------------------------------------|
| Drawer Count              | 4                                                                                                                                           |
| Exterior Construction     | Stainless steel front and top, aluminium sides and rear                                                                                     |
| Interior Construction     | Clear coated aluminium, stainless steel base                                                                                                |
| Air Intake Position       | Front                                                                                                                                       |
| Ventilation Position      | Right side                                                                                                                                  |
| Clearance Required        | 26 mm rear, 26 mm right side. Minimum clearance of 102 mm is required between bottom of cooking equipment heating element and the TRCB top. |
| Cord Length (Meters)      | 2.13                                                                                                                                        |
| Max Weight Supported (kg) | 651                                                                                                                                         |
| Standard w/ Locks         | Not Standard (build option)                                                                                                                 |

| Technical                      |                                                                                    |
|--------------------------------|------------------------------------------------------------------------------------|
| Temperature Range              | 0.5 : 3.3°C                                                                        |
| Refrigerant                    | R290                                                                               |
| Voltage/Frequency/Phase        | 220-240V/50-60Hz/1                                                                 |
| Amps                           | 2                                                                                  |
| Watts                          | 460                                                                                |
| Climate Class                  | 5                                                                                  |
| Operating Statement            | Heavy Duty: This appliance is intended for use in ambient temperatures up to 40°C. |
| Test Standard                  | EN 16825                                                                           |
| EEC                            | D                                                                                  |
| Energy Efficiency Index        | 67.3                                                                               |
| Defrost Type                   | Auto                                                                               |
| Energy Consumption (kWh/24h)   | 4.033                                                                              |
| Energy Consumption (kWh/Annum) | 1472                                                                               |



Specifications subject to change without notice.  
Chart dimensions rounded up to the next whole millimeter (inches rounded up to the 1/8")

UK & Ireland  
EMEA  
Australia


0800 783 2049  
[+41 61 563 07 05](tel:+41615630705)  
[+61 2 9619 9999](tel:+61296199999)

[TFIUK@truemfg.com](mailto:TFIUK@truemfg.com)  
[TrueCHCustomerService@truemfg.com](mailto:TrueCHCustomerService@truemfg.com)  
[TrueRefAus@truemfg.com](mailto:TrueRefAus@truemfg.com)



# TRCB-96-HC

Under-Equipment Refrigerator, 4 Drawers

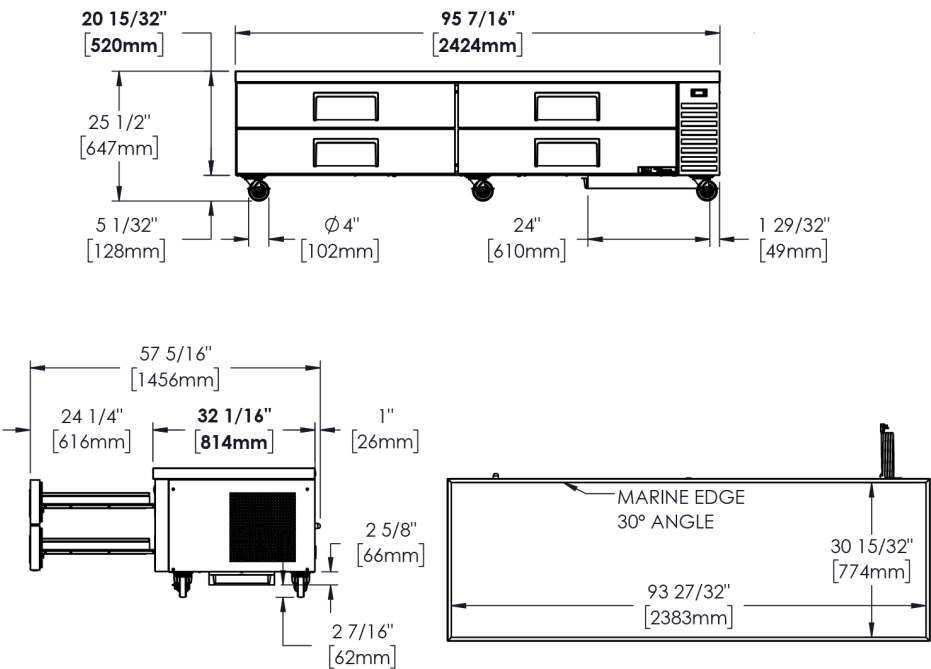

Specifications subject to change without notice.  
Chart dimensions rounded up to the next whole millimeter (inches rounded up to the 1/8")

UK & Ireland  
EMEA  
Australia

0800 783 2049  
+41 61 563 07 05  
+61 2 9619 9999

TFIUK@truemfg.com  
TrueCHCustomerService@truemfg.com  
TrueRefAus@truemfg.com

